


EYE BOLTS

[download pdf \(50 Kb.\)](#)


High Polished Stainless Steel - AISI 304

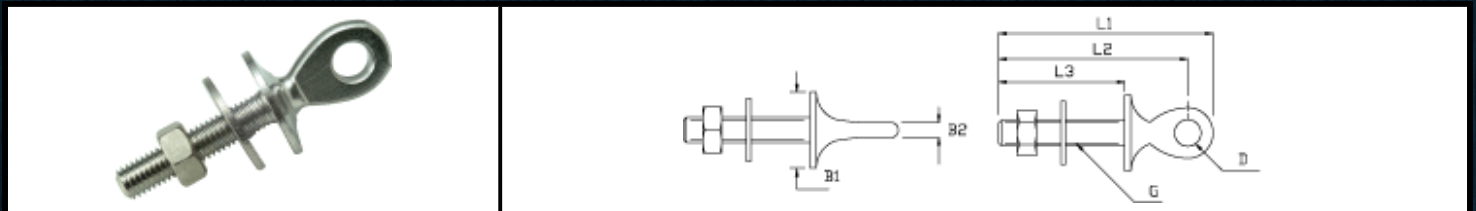

Cat. No.	G	L1 (mm.)	L2 (mm.)	L3 (mm.)	B1 (mm.)	B2 (mm.)	D (mm.)	Thread Length (mm.)	Break Load (Kg.)	Kg./100	PACK (Pcs.)
310630	M6	53	46	30	25	4	6,5	30	1.300	1,3	10
310660	M6	83	76	60	25	4	6,5	60	1.300	2,1	10
310835	M8	65	58	35	25	5	8,5	35	2.400	3,3	10
310880	M8	110	104	80	25	5	8,5	75	2.400	5	10
311050	M10	87	75	50	30	6	10,5	50	3.500	8,2	10
311000	M10	137	125	100	30	6	10,5	85	3.500	11	10

Note: All breakloads are determined by eye (D) and thread.


The user is responsible for choosing the proper cable diameter and for correct assembly.

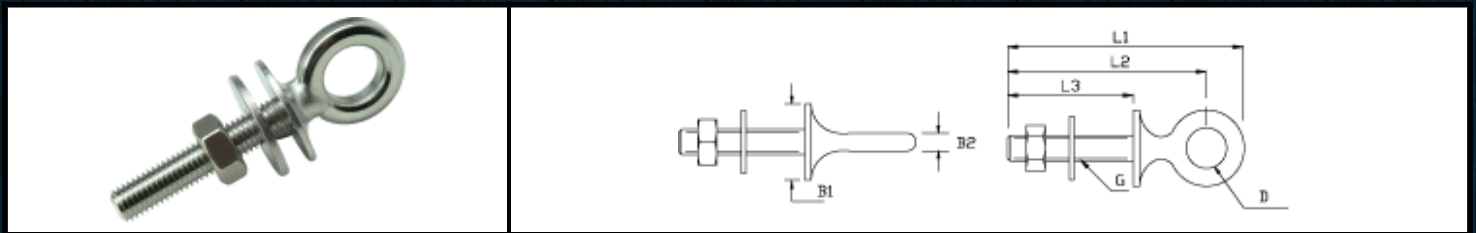

Cat. No.	G	L1 (mm.)	L2 (mm.)	L3 (mm.)	B1 (mm.)	B2 (mm.)	D (mm.)	Thread Length (mm.)	Break Load (Kg.)	Kg./100	PACK (Pcs.)
370630	M6	57	46	30	25	5	13	30	1.300	1,8	10
370640	M6	66	56	40	25	5	13	40	1.300	2,8	10
370650	M6	76	62	50	25	5	13	50	1.300	3	10
370660	M6	87	76	60	25	5	13	60	1.300	2,6	10
370600	M6	126	115	100	25	5	13	95	1.300	3,7	10
370835	M8	66	53	35	25	6	15	35	2.400	3,8	10
370850	M8	80	68	50	25	6	15	50	2.400	4,9	10
370880	M8	110	98	80	25	6	15	75	2.400	5,5	10
370800	M8	130	118	100	25	6	15	75	2.400	6,5	10
371050	M10	85	70	50	30	7	16	50	3.500	8,7	10

371000	M10	135	120	100	30	7	16	95	3.500	11	10
371210	M12	140	124	100	30	9	18	85	4.500	15	10
371216	M12	200	184	160	30	9	18	85	4.500	19	10

Note: All breakloads are determined by eye (D) and thread.  
The user is responsible for choosing the proper cable diameter and for correct assembly.

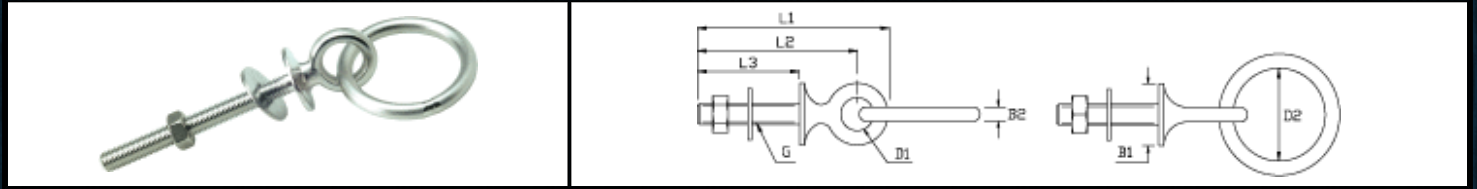

Cat. No.	G	L1 (mm.)	L2 (mm.)	L3 (mm.)	B1 (mm.)	B2 (mm.)	D1 (mm.)	D2 (mm.)	Thread Length (mm.)	Break Load (Kg.)	Kg./100	PACK (Pcs.)
380630	M6	57	46	30	25	5	13	30	30	950	4,4	10
380660	M6	87	76	60	25	5	13	30	60	950	4,9	10
380835	M8	66	53	35	25	6	15	40	35	1.500	7,3	10
380880	M8	111	98	80	25	6	15	40	75	1.500	8,8	10
381050	M10	85	70	50	30	7	16	45	50	2.200	13,6	10
381000	M10	135	120	100	30	7	16	45	95	2.200	16,3	10
381210	M12	140	124	100	30	10	18	50	85	3.300	28,2	10
381216	M12	200	184	160	30	10	18	50	85	3.300	32,1	10

Note: All breakloads are determined by ring (D2).  
The user is responsible for choosing the proper cable diameter and for correct assembly.

back

**allRIG**

Buscarons, 6 - 08022 Barcelona | Tel.: (+34) 934 186 632 | Fax: (+34) 934 185 648

E-Mail: [info@allrig.net](mailto:info@allrig.net) | [www.allrig.net](http://www.allrig.net)