


RIGGING SCREWS FORK-WIRE
Metric[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316

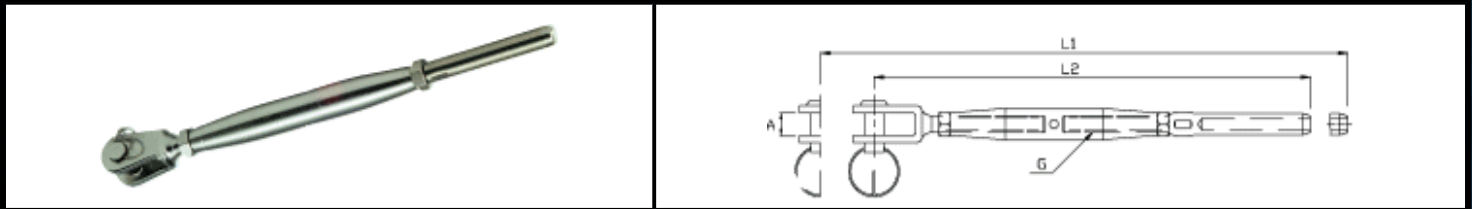

Cat. No.	G (metr.)	Wire (metr.)	L1 (mm.)	L2 (mm.)	A (mm.)	Pin size	Break Load (Kg.)	Kg./100	PACK (Pcs.)
120204	M4	2	188	136	6,5	4	500	3,3	10
120205	M5	2	206	152	7,5	5	800	4,5	10
120505	M5	2,5	206	152	7,5	5	800	4,6	10
120306	M6	3	232	170	7,5	5	1250	8,5	10
120306X	M6	3	233	171	9,5	6	1300	8,5	10
120406	M6	4	242	180	7,5	5	1000	8,7	10
120406X	M6	4	242	180	9,5	6	1300	9,1	10
120408	M8	4	275	199	9,5	6	1300	13	10
120408X	M8	4	277	201	11	8	2350	13	10
120510	M10	5	312	228	11	8	2600	22,5	10
120510X	M10	5	316	232	12	9,5	3500	22,5	10
120612	M12	6	393	287	14	12	5100	47,5	5
120714X	M14	7	447	327	18	14	5900	58	5
120816X	M16	8	499	366	18	16	8000	89,5	5
121020	M20	10	587	427	24	19	13000	170,1	BULK
▼121220	M20	12	606	446	24	19	13000	170,1	BULK
121220X	M20	12	622	462	24	19	13000	170,1	BULK
121422	M22	14	736	556	30	22	17000	386	BULK
121624	M24	16	874	641	30	25,4	20000	662	BULK

▼Note: Terminal OD.=20 mm.

Note: All breakloads are determined by clevis pin & thread.

The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)



Buscarons, 6 - 08022 Barcelona | Tel.: (+34) 934 186 632 | Fax: (+34) 934 185 648
E-Mail: info@allrig.net | www.allrig.net