


MTR-MONO TUNING RACING STEMBALL-ROD

[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316

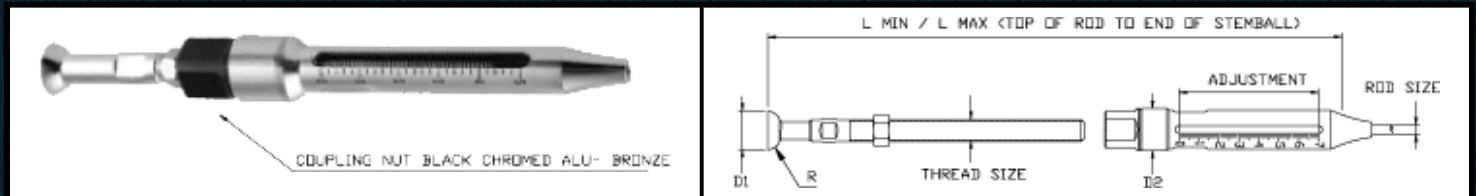

Cat. No.	Rod dim. (mm.)	Thread left hand	L min. (mm.)	L max. (mm.)	D1 (mm.)	D2 (mm.)	R (mm.)	Break load (Kg.)	Kg./100	Pack Pcs.
M2 014030	3	1/4"	125	175	16,8	19,5	9	1.000	15	BULK
M2 516040	4	5/16"	129	179	16,8	19,5	9	1.700	15	BULK
M2 038050	5	3/8"	150	210	16,8	22,5	9	2.850	20	BULK
M2 716050	5	7/16"	162	232	19,7	22,5	11	2.850	28	BULK
M2 716057	5,7	7/16"	162	232	19,7	23,5	11	3.750	35	BULK
M2 012060	6	1/2"	192	272	23,2	29,5	12	4.000	40	BULK
M2 012064	6,4	1/2"	192	272	23,2	29,5	12	4.600	40	BULK
M2 058071	7,1	5/8"	234	334	23,2	37	15	5.700	100	BULK
M2 058075	7,5	5/8"	234	334	27,8	37	15	6.300	100	BULK
M2 058080	8	5/8"	234	334	27,8	37	15	7.100	100	BULK
M2 058084	8,4	5/8"	234	334	27,8	37	15	7.700	100	BULK
M2 034095	9,5	3/4"	286	406	31,7	46	17,5	10.000	163	BULK
M2 078111	11,1	7/8"	322	452	35,7	51,4	20	13.500	297	BULK
M2 010127	12,7	1"	382	542	38,7	60	22	16.500	456	BULK
M2 118143	14,3	1-1/8"	410	590	41,7	60	23	20.500	517	BULK
M2 138168	16,8	1-3/8"	461	661	46,8	65	25	28.500	551	BULK

The user is responsible for choosing the proper cable diameter and for correct assembly.

back

*all*RIG

Buscarons, 6 - 08022 Barcelona | Tel.: (+34) 934 186 632 | Fax: (+34) 934 185 648

E-Mail: info@allrig.net | www.allrig.net