


STAINLESS STEEL WIRE ROPE

[download pdf \(50 Kb.\)](#)


Stainless Steel - AISI 316

1x19 AISI 316 BS MA 29:1982

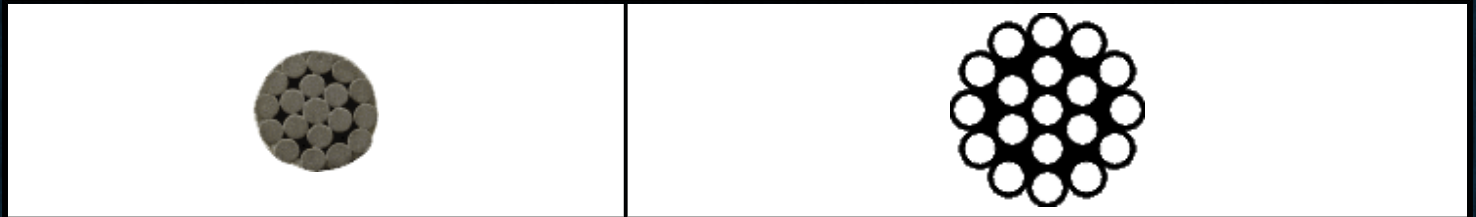

Cat. No.	Dim. (mm.)	Tensile strenght (Kn.)	Ca. Kg./100 m.
WR11902	2	3,14	1,99
WR11925	2,5	4,9	3,1
WR11903	3	7,06	4,47
WR11904	4	12,6	7,95
WR11905	5	19,6	12,4
WR11906	6	28,1	17,9
WR11907	7	34,8	24,3
WR11908	8	45,5	31,8
WR11910	10	71,1	49,7
WR11912	12	102	71,3

7x19 AISI 316 BS MA 29:1982

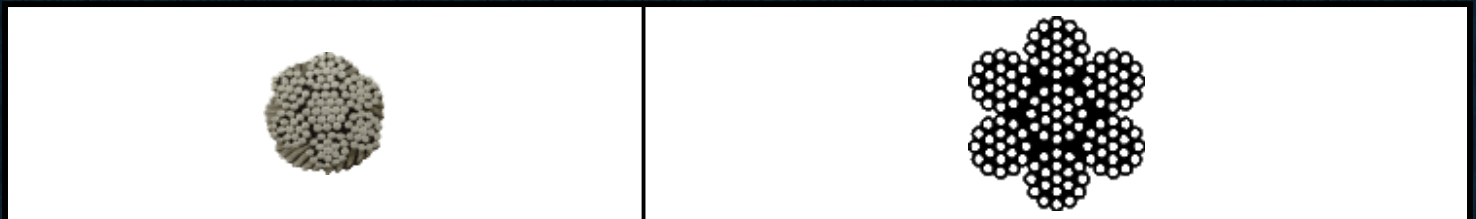

Cat. No.	Dim. (mm.)	Tensile strenght (Kn.)	Ca. Kg./100 m.
WR71902 #	2	2,08	1,58
WR71925 #	2,5	3,25	2,4
WR71903	3	5	3,84
WR71904	4	8,89	6,49
WR71905	5	13,9	9,14
WR71906	6	20	13,8
WR71908	8	35,6	23,87

WR71910	10	55,6	40,3
WR71912	12	80	55

= According to DIN 3060.

7x7 AISI 316 BS MA 29:1982



Cat. No.	Dim. (mm.)	Tensile strenght (Kn.)	Ca. Kg./100 m.
WR70702	2	2,37	1,71
WR70725	2,5	3,71	2,6
WR70703	3	5,34	3,85
WR70704	4	9,49	7
WR70705	5	14,8	10,5
WR70706	6	21,4	14,8
WR70708	8	38	25,5
WR70710	10	59,3	38,8

1x19 AISI 316 COATED WHITE



Cat. No.	Dim. (mm.)	Tensile strenght (Kn.)	Ca. Kg./100 m.
CW119460	4-6	12,6	9,5
CW119480	4-8	12,6	13,5

7x7 AISI 316 COATED WHITE



Cat. No.	Dim. (mm.)	Tensile strenght (Kn.)	Ca. Kg./100 m.
CW707460	4-6	9,49	8,75
CW707480	4-8	9,49	9,5

The user is responsible for choosing the proper cable diameter and for correct assembly.

allRIG deliver wire rope in following standard reel sizes.

Please order: Example:

125 Meter: Cat. No. WR119021
+ /1

250 Meter: Cat. No. + /2 WR119022

500 Meter: Cat. No. + /3 WR119023

[back](#)

allRIG

Buscarons, 6 - 08022 Barcelona | Tel.: (+34) 934 186 632 | Fax: (+34) 934 185 648

E-Mail: info@allrig.net | www.allrig.net