


STAY ADJUSTERS


[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 304

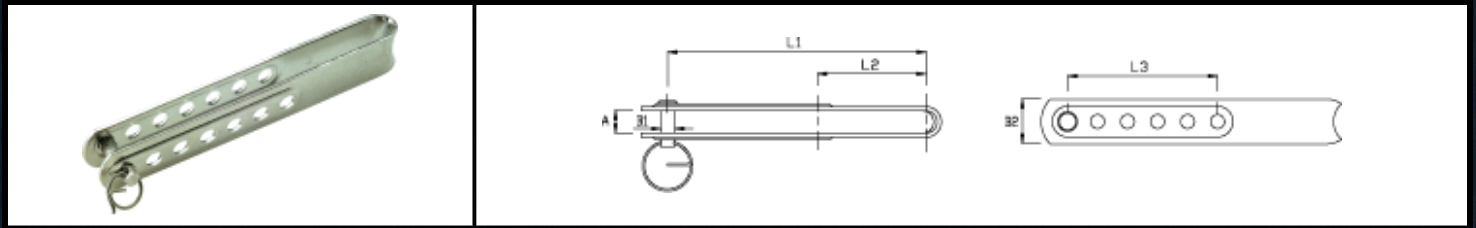

Cat. No.	L1 (mm.)	L2 (mm.)	L3 (mm.)	A (mm.)	B1 (mm.)	B2 (mm.)	Break Load (Kg.)	Kg./100	PACK (Pcs.)
350005	93	39	54	8	5	16	900	4,5	10
350006	115	39	65	10	6	22	1.600	9,5	10

Note: All breakloads are determined by pin.
The user is responsible for choosing the proper cable diameter and for correct assembly.

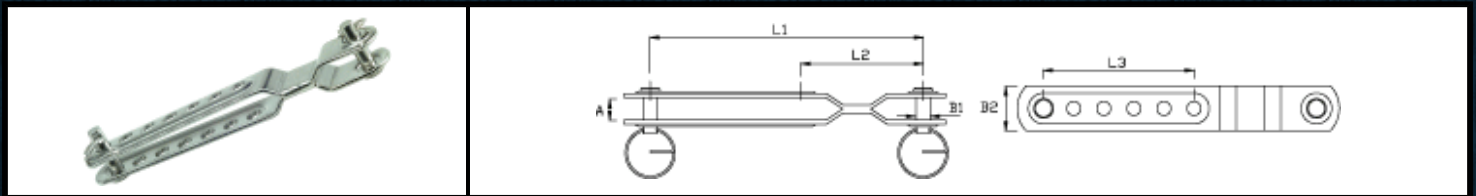

Cat. No.	L1 (mm.)	L2 (mm.)	L3 (mm.)	A (mm.)	B1 (mm.)	B2 (mm.)	Break Load (Kg.)	Kg./100	PACK (Pcs.)
360005	98	44	54	8	5	16	800	3,9	10
360006	115	50	65	10	6	22	1.500	8,3	10

Note: All breakloads are determined by pin.
The user is responsible for choosing the proper cable diameter and for correct assembly.



Buscarons, 6 - 08022 Barcelona | Tel.: (+34) 934 186 632 | Fax: (+34) 934 185 648

E-Mail: info@allrig.net | www.allrig.net