


MACHINED FORK TERMINALS[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316

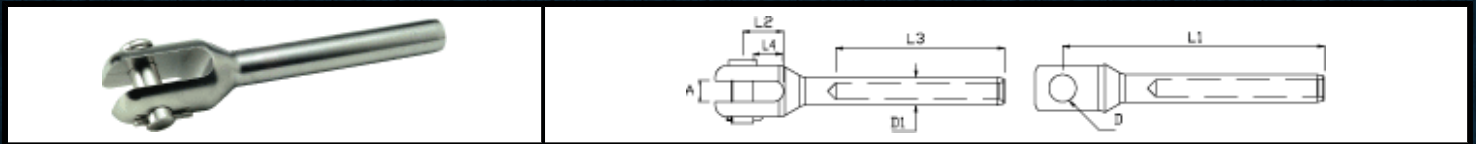

Cat. No.	Wire (metr.) (mm.)	L1 (mm.)	L2 (mm.)	L3 (mm.)	L4 (mm.)	A (mm.)	D1 PIN (mm.)	D1 (mm.)	Break Load (Kg.)	Kg./100	PACK (Pcs.)
721912	12	197	45	105	35,5	20	19	20	1.300	100	BULK
722214	14	239	49	140	38	22	22	25	17.000	170	BULK
722516	16	271	52	160	39,3	25	25,4	28	24.000	210	BULK
722819	19	327	55	200	41	30	28	34,5	25.500	330	BULK
723222	22	377	67	230	51	35	32	40,4	31.000	480	BULK
723526	26	434	67	280	49,5	35	35	46	43.000	700	BULK

Note: All breakloads are determined by clevis pin & thread.
The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)