


RIGGING SCREWS FORK-FORK Metric

[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316
Chromed Bronze Body

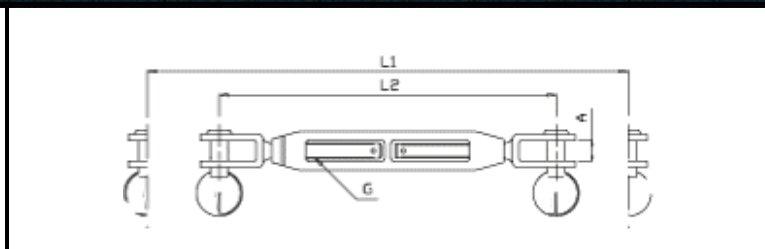

Cat. No.	G (metr.)	L1 (mm.)	L2 (mm.)	A (mm.)	Pin Size	Break Load (Kg.)	Kg./100	PACK (Pcs.)
130006	M6	218	143	9,5	6	1.300	12	10
130008	M8	260	168	11	8	2.350	16	10
130010	M10	313	197	12	9,5	3.500	25	5
130012	M12	372	248	14	12	5.100	63,5	5
130016X	M16	464	312	18	16	8.000	121	BULK
130020	M20	576	392	24	19	13.000	218	BULK

Note: All breakloads are determined by clevis pin & thread.
The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)