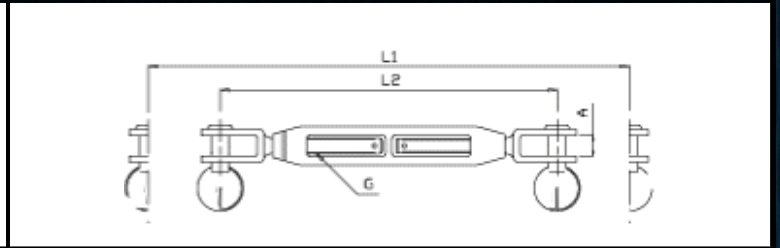


**RIGGING SCREWS FORK-FORK  
U.N.F. (Unified National Fine)**[download pdf \(50 Kb.\)](#)High Polished Stainless Steel - AISI 316  
Chromed Bronze Body

Cat. No.	G (UNF)	L1 (mm.)	L2 (mm.)	A (mm.)	Pin Size	Break Load (Kg.)	Kg./100	PACK (Pcs.)
130006A	1/4"	205	143	9,5	6,35	1.300	12	10
130008A	5/16"	244	168	11	8	2.350	16	10
130010A	3/8"	299	197	12	9,5	3.500	25	5
130011A	7/16"	312	222	12	11	4.700	35	5
130012A	1/2"	358	248	14	12,7	5.400	63,5	5
130016AX	5/8"	450	312	18	16	8.000	121	BULK
130020A	3/4"	562	392	24	19	13.000	218	BULK
130022A	7/8"	753	559	26	22	17.000	316	BULK
130025A	1"	888	648	29	25,4	24.000	490	BULK

Note: All breakloads are determined by clevis pin & thread.  
The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)