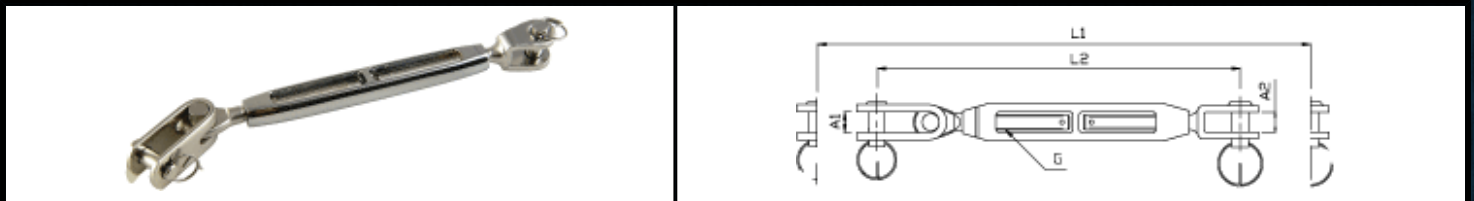


RIGGING SCREWS FORK - TOGGLE[download pdf \(50 Kb.\)](#)High Polished Stainless Steel - AISI 316
Chromed Bronze Body

Cat. No.	G (UNF)	L1 (mm.)	L2 (mm.)	A1 (mm.)	A2 (mm.)	Pin size (mm.)	Break load (Kg.)	Kg./100	Pack Pcs.
330006A	1/4"	225	163	8	9,5	6,35	1.300	12,8	10
330008A	5/16"	268	192	10	11	8	2.350	20,5	10
330010A	3/8"	313	229	12	12	9,5	3.500	32,5	5
330011AX	7/16"	350	260	15	12	11	4.700	54	5
330012AX	1/2"	382	276	18	14	12,7	5.400	80	5
330016AX	5/8"	491	359	20	18	16	8.000	137	BULK
330020AX	3/4"	586	426	24	24	19	13.000	228	BULK
330022AX	7/8"	710	516	26	30	22	17.000	410	BULK
330025AX	1"	835	595	29	30	25,4	24.000	575	BULK

Note: All breakloads are determined by clevis pin & thread.
The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)