


## RIGGING SCREWS FORK-WIRE U.N.F. (Unified National Fine)

[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316  
Chromed Bronze Body

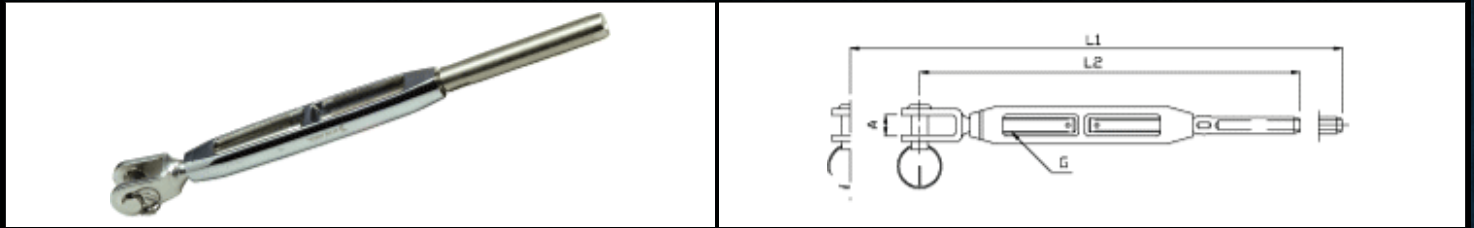

Cat. No.	G (UNF)	Wire (metr.)	Dim (inch)	L1 (mm.)	L2 (mm.)	A (mm.)	Pin size	Break Load (Kg.)	Kg./100	PACK (Pcs.)
130306A	1/4"	3	1/8"	236	174	9,5	6,35	1.300	10,7	10
130406A	1/4"	4	5/32"	246	184	9,5	6,35	1.300	11	10
130408A	5/16"	4	5/32"	280	204	11	8	2.350	14,5	10
130510A	3/8"	5	3/16"	317	233	12	9,5	3.500	23,2	10
135510A	3/8"	-	7/32"	325	241	12	9,5	3.500	24,5	10
130611A	7/16"	6	-	365	275	12	11	4.700	36,5	5
130711A	7/16"	7	9/32"	370	280	12	11	4.700	34,5	5
130612A	1/2"	6	-	397	291	14	12,7	5.400	55	5
136312A	1/2"	-	1/4"	397	291	14	12,7	5.400	55	5
130712A	1/2"	7	9/32"	405	299	14	12,7	5.400	55	5
130816AX	5/8"	8	5/16"	496	364	18	16	8.000	109,5	BULK
139520A	3/4"	-	3/8"	591	431	24	19	13.000	191	BULK
131020A	3/4"	10	-	591	431	24	19	13.000	191	BULK
▼ 131220A	3/4"	12	-	606	446	24	19	13.000	194	BULK
131220AX	3/4"	12	-	626	466	24	19	13.000	196	BULK
131320A	3/4"	-	1/2"	627	467	24	19	13.000	196	BULK
131422A	7/8"	14	-	794	600	26	22	17.000	304	BULK
131625A	1"	16	5/8"	940	700	29	25,4	24.000	445	BULK

▼ Note: Terminal OD.=20 mm.

Note: All breakloads are determined by clevis pin & thread.

The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)



Buscarons, 6 - 08022 Barcelona | Tel.: (+34) 934 186 632 | Fax: (+34) 934 185 648  
E-Mail: [info@allrig.net](mailto:info@allrig.net) | [www.allrig.net](http://www.allrig.net)