


RIGGING SCREWS FORK-FORK Metric

[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316

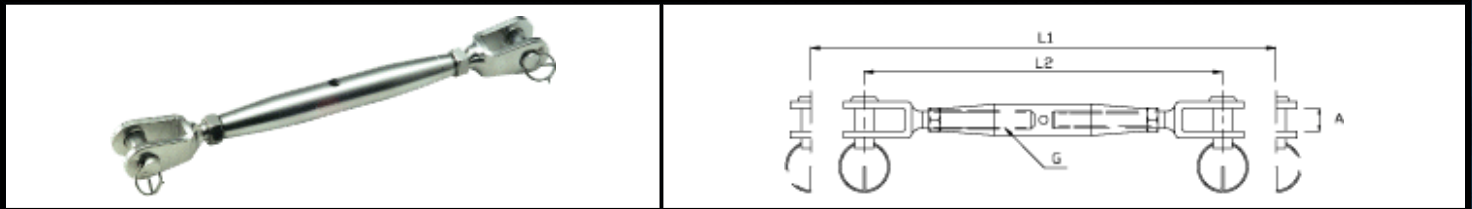

Cat. No.	G (metr.)	L1 (mm.)	L2 (mm.)	A (mm.)	Pin size	Break Load (Kg.)	Kg./100	PACK (Pcs.)
120004	M4	156	106	6,5	4	500	3,3	10
120005	M5	180	126	7,5	5	800	5,1	10
120006	M6	200	138	7,5	5	1250	9	10
120006X	M6	202	140	9,5	6	1300	14	10
120008	M8	234	158	9,5	6	1300	14	10
120008X	M8	240	166	11	8	2350	15	10
120010	M10	272	188	11	8	2600	24	10
120010X	M10	280	196	12	9,5	3500	26	10
120012	M12	350	244	14	12	5100	52,5	5
120014X	M14	403	283	18	14	5900	63,5	5
120016X	M16	446	313	18	16	8000	100	5
120020	M20	550	390	24	19	13000	197	BULK
120022	M22	653	472	30	22	17000	430	BULK
120024	M24	769	536	30	25,4	20000	638	BULK

Note: All breakloads are determined by clevis pin & thread.

The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)