


**RIGGING SCREWS FORK-FORK
U.N.F. (Unified National Fine)**[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316

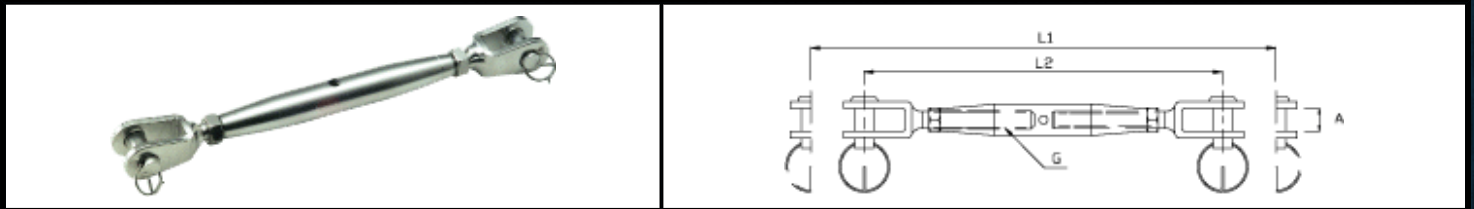

Cat. No.	G (UNF)	L1 (mm.)	L2 (mm.)	A (mm.)	Pin size	Break Load (Kg.)	Kg./100	PACK (Pcs.)
120006A	1/4"	232	140	9,5	6,35	1300	10	10
120008A	5/16"	242	168	11	8	2350	15	10
120010A	3/8"	274	190	12	9,5	3500	25,1	5
120011A	7/16"	310	219	12	11	4700	35,2	5
120012A	1/2"	350	244	14	12,7	5400	54,5	5
120016AX	5/8"	447	314	18	16	8000	100	5
120020A	3/4"	548	388	24	19	13000	197	BULK
120022A	7/8"	652	471	30	22	17000	430	BULK
120025A	1"	766	536	30	25,4	24000	643	BULK

Note: All breakloads are determined by clevis pin & thread.
The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)