


RIGGING SCREWS FORK - TOGGLE[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316

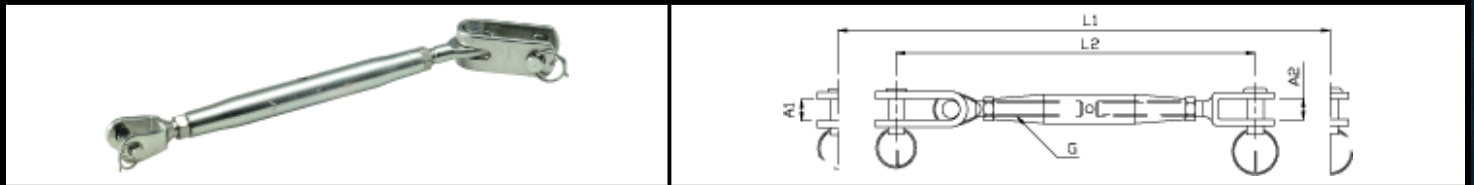

Cat. No.	G (UNF)	L1 (mm.)	L2 (mm.)	A1 (mm.)	A2 (mm.)	Pin size (mm.)	Break load (Kg.)	Kg./100	Pack Pcs.
320006A	1/4"	222	157	8	9,5	6,35	1.300	10,8	10
320008A	5/16"	268	192	10	11	8	2.350	19,5	10
320010A	3/8"	306	222	12	12	9,5	3.500	32,5	5
320011AX	7/16"	347	257	15	12	11	4.700	45	5
320012AX	1/2"	378	272	18	14	12,7	5.400	71	5
320016AX	5/8"	493	361	20	18	16	8.000	116	BULK
320020AX	3/4"	582	422	24	24	19	13.000	207	BULK
320022AX	7/8"	695	515	26	30	22	17.000	520	BULK
320025AX	1"	818	589	29	30	25,4	24.000	767,7	BULK

Note: All breakloads are determined by clevis pin & thread.
The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)