


RIGGING SCREWS FORK-WIRE U.N.F. (Unified National Fine)

[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316

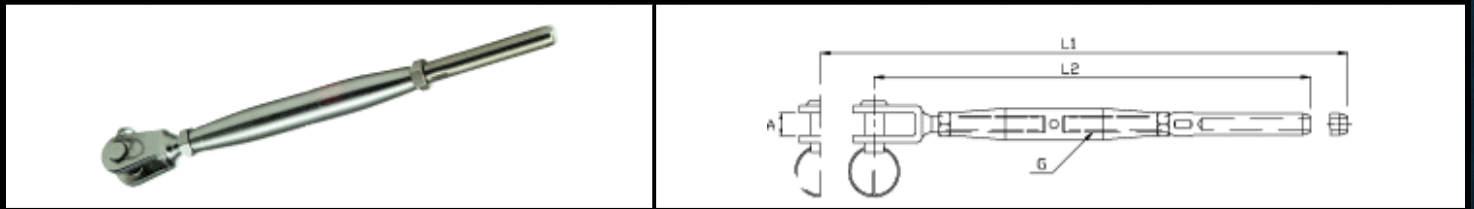

Cat. No.	G (UNF)	Wire (metr.)	Dim (inch)	L1 (mm.)	L2 (mm.)	A (mm.)	Pin size	Break Load (Kg.)	Kg./100	PACK (Pcs.)
120306A	1/4"	3	1/8"	233	170	9,5	6,35	1300	8,7	10
120406A	1/4"	4	5/32"	242	180	9,5	6,35	1300	9	10
120408A	5/16"	4	5/32"	275	199	11	8	2350	13,3	10
120510A	3/8"	5	3/16"	306	222	12	9,5	3500	23,2	10
125510A	3/8"	-	7/32"	314	230	12	9,5	3500	24,5	10
120611A	7/16"	6	-	362	272	12	11	4700	36,2	5
120711A	7/16"	7	9/32"	367	277	12	11	4700	34,3	5
120612A	1/2"	6	-	393	287	14	12,7	5400	46	5
126312A	1/2"	-	1/4"	393	287	14	12,7	5400	46	5
120816AX	5/8"	8	5/16"	499	366	18	16	8000	88,5	5
129520A	3/4"	-	3/8"	587	427	24	19	13000	170	BULK
121020A	3/4"	10	-	587	427	24	19	13000	170	BULK
121220A	3/4"	12	-	602	442	24	19	13000	172	BULK
121220AX	3/4"	12	-	622	462	24	19	13000	173	BULK
121320A	3/4"	-	1/2"	623	463	24	19	13000	175	BULK
121422A	7/8"	14	-	736	555	30	22	17000	386	BULK
121425A	1"	14	-	843	613	30	25,4	24000	580	BULK
121625A	1"	16	5/8"	871	641	30	25,4	24000	597	BULK

▼ Note: Terminal OD.=20 mm.

Note: All breakloads are determined by clevis pin & thread.

The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)



Buscarons, 6 - 08022 Barcelona | Tel.: (+34) 934 186 632 | Fax: (+34) 934 185 648
E-Mail: info@allrig.net | www.allrig.net