


RIGGING SCREWS TOGGLE-ROD

[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316
Chromed Bronze Body

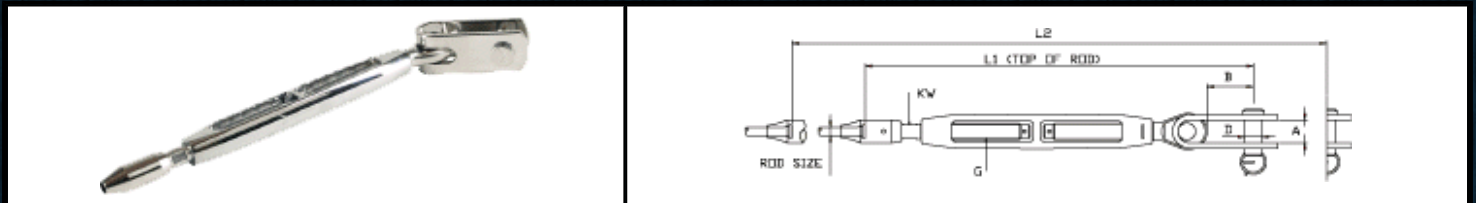

Cat. No.	G (U.N.F.)	Rod size (mm.)	L1 (mm.)	L2 (mm.)	A (mm.)	B (mm.)	D (mm.)	KW (mm.)	Break load (Kg.)	Pack (Pcs.)
RT516003	5/16"	3	195	285	10	16	8	6	1.000	BULK
RT516004	5/16"	4	195	285	10	16	8	6	1.700	BULK
RT038005	3/8"	5	230,5	313	12	26	9,5	7	3.500	BULK
RT716005	7/16"	5	259,5	349,5	15	28	11	8	2.850	BULK
RT716057	7/16"	5,7	259,5	349,5	15	28	11	8	3.750	BULK
RT012057	1/2"	5,7	280,5	386,5	18	31	12,7	10	3.750	BULK
RT716006	7/16"	6	259,5	349,5	15	28	11	8	4.000	BULK
RT012006	1/2"	6	280,5	386,5	18	31	12,7	10	4.000	BULK
RT012064	1/2"	6,4	280,5	386,5	18	31	12,7	10	4.600	BULK
RT012071	1/2"	7,1	280,5	386,5	18	31	12,7	10	5.700	BULK
RT058071	5/8"	7,1	379,5	511,5	20	37	16	13	5.700	BULK
RT058075	5/8"	7,5	379,5	511,5	20	37	16	13	6.300	BULK
RT058008	5/8"	8	379,5	511,5	20	37	16	13	7.100	BULK
RT058084	5/8"	8,4	379,5	511,5	20	37	16	13	7.700	BULK
RT034084	3/4"	8,4	417,5	577,5	24	40	19	17	7.700	BULK
RT034095	3/4"	9,5	417,5	577,5	24	40	19	17	10.000	BULK
RT078111	7/8"	11,1	569,5	683,5	26	46	22	19	13.500	BULK
RT078127	7/8"	12,7	484,5	678,5	26	46	22	22	16.500	BULK
RT001127	1"	12,7	562,5	824,5	29	53	25,4	22	16.500	BULK

Note: All breakloads determined by Rod.
The user is responsible for choosing the proper cable diameter and for correct assembly.



Buscarons, 6 - 08022 Barcelona | Tel.: (+34) 934 186 632 | Fax: (+34) 934 185 648
E-Mail: info@allrig.net | www.allrig.net