


"V" BOLTS[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316

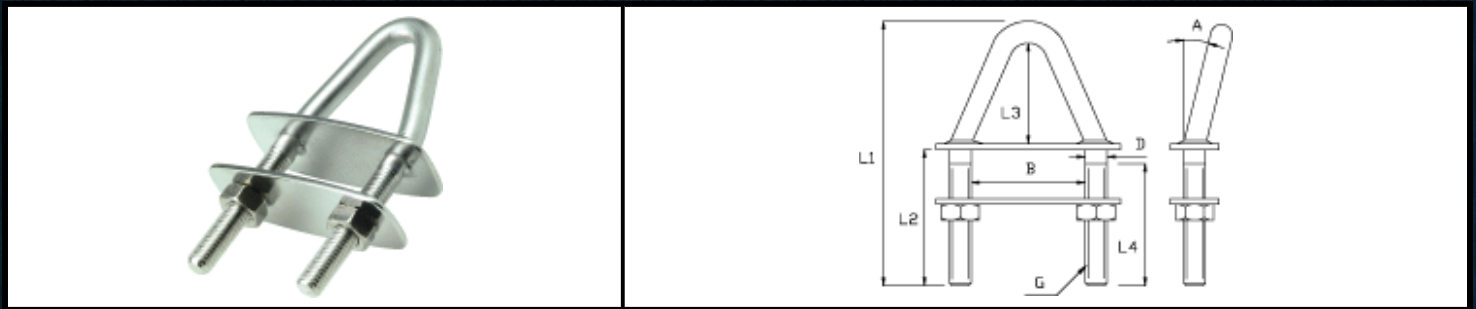

Cat. No.	G	L1 (mm.)	L2 (mm.)	L3 (mm.)	L4 (mm.)	A (mm.)	B (mm.)	D (mm.)	Break Load (Kg.)	Kg./100	PACK (Pcs.)
408500	M8	100	50	40	45	0	33	8	3.500	12,5	5
408508	M8	100	50	40	45	8	33	8	3.500	12,5	5
408518	M8	100	50	40	45	18	33	8	3.500	12,5	5
410600	M10	120	60	48	55	0	40	10	5.100	15	5
410608	M10	120	60	48	55	8	40	10	5.100	15	5
410618	M10	120	60	48	55	18	40	10	5.100	15	5

Note: All breakloads are determined by thread.

The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)