


WELDED FORK TERMINALS

[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316

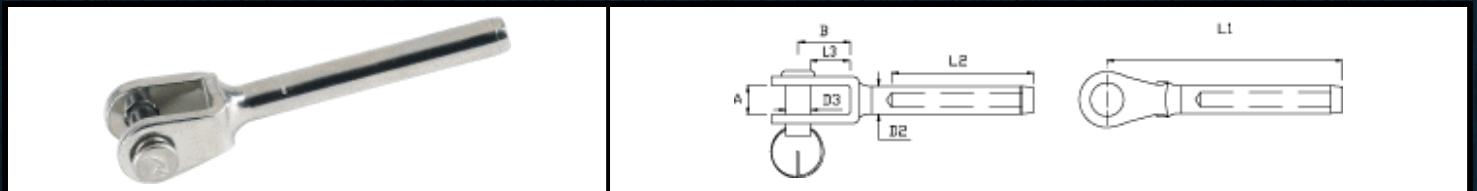

| Cat. No. | Wire (metr.) (mm.) | Wire (inch.) | D2 (mm.) | D3 (mm.) | L1 (mm.) | L2 (mm.) | L3 (mm.) | A (mm.) | B (mm.) | Break Load (Kg.) | Kg./100 | PACK (Pcs.) |
|----------|--------------------|--------------|----------|----------|----------|----------|----------|---------|---------|------------------|---------|-------------|
| 100402 | 2 | 1/16" | 5,5 | 4 | 55 | 32 | 7,5 | 6,5 | 9,5 | 500 | 1,5 | 25 |
| 100502 | 2 | 1/16" | 5,5 | 5 | 58 | 32 | 9,5 | 7,5 | 12 | 800 | 2 | 25 |
| 100525 | 2,5 | 3/32" | 5,5 | 5 | 58 | 32 | 9,5 | 7,5 | 12 | 800 | 2 | 25 |
| 100503 | 3 | 1/8" | 6,35 | 5 | 67 | 38 | 9,5 | 7,5 | 12 | 800 | 2,3 | 25 |
| 100603 | 3 | 1/8" | 6,35 | 6 | 68 | 38 | 10 | 9,5 | 13 | 1.250 | 2,8 | 25 |
| 106303 | 3 | 1/8" | 6,35 | 6,3 | 68 | 38 | 10 | 9,5 | 13 | 1.250 | 2,8 | 25 |
| 100504 | 4 | 5/32" | 7,5 | 5 | 71 | 45 | 9,5 | 7,5 | 12 | 800 | 2,7 | 25 |
| 100604 | 4 | 5/32" | 7,5 | 6 | 73 | 45 | 10 | 9,5 | 13 | 1.250 | 3,4 | 25 |
| 106304 | 4 | 1/32" | 7,5 | 6,3 | 73 | 45 | 10 | 9,5 | 13 | 1.250 | 3,4 | 25 |
| 100804 | 4 | 5/32" | 7,5 | 8 | 77 | 45 | 11 | 11 | 15 | 2.350 | 4,9 | 25 |
| 100805 | 5 | 3/16" | 9 | 8 | 87 | 51 | 11 | 11 | 15 | 2.350 | 5,5 | 10 |
| 109505 | 5 | 3/16" | 9 | 9,5 | 91 | 51 | 14,3 | 12 | 19 | 3.500 | 7,2 | 10 |
| 109506 | 6 | - | 12,58 | 9,5 | 104 | 64 | 14,3 | 12 | 19 | 3.500 | 11,3 | 10 |
| 101106 | 6 | - | 12,58 | 11 | 108 | 64 | 17,5 | 12 | 23 | 4.100 | 13,9 | 10 |
| 101163 | - | 1/4" | 12,58 | 11 | 108 | 64 | 17,5 | 12 | 23 | 4.100 | 13,5 | 10 |
| 101206 | 6 | - | 12,58 | 12 | 110 | 64 | 19 | 14 | 25 | 5.100 | 17,6 | 10 |
| 101207 | 7 | 9/32" | 14,2 | 12 | 119 | 70 | 19 | 14 | 25 | 5.100 | 18,1 | 10 |
| 101307 | 7 | 9/32" | 14,2 | 12,7 | 119 | 70 | 19 | 14 | 25 | 5.100 | 18,1 | 10 |
| 101208 | 8 | 5/16" | 16 | 12 | 136 | 83 | 19 | 14 | 25 | 5.100 | 21,6 | 10 |
| 101308 | 8 | 5/16" | 16 | 12,7 | 136 | 83 | 19 | 14 | 25 | 5.100 | 21,6 | 10 |
| 101608 | 8 | 5/16" | 16 | 16 | 145 | 83 | 25 | 18 | 33 | 8.000 | 25,5 | 10 |
| 101495 | - | 3/8" | 17,8 | 14 | 151 | 89 | 26 | 18 | 33 | 7.600 | 36 | 10 |
| 101610 | 10 | - | 17,8 | 16 | 151 | 89 | 25 | 18 | 33 | 8.000 | 37 | 5 |
| 101910 | 10 | - | 17,8 | 19 | 168 | 89 | 41 | 24 | 50,5 | 13.000 | 52,4 | 5 |
| 101912x | 12 | - | 21,4 | 19 | 205 | 120 | 41 | 24 | 50,5 | 13.000 | 75 | 5 |
| 101913 | - | 1/2" | 21,4 | 19 | 205 | 120 | 41 | 24 | 50,5 | 13.000 | 73 | 5 |
| 102214 | 14 | - | 25 | 22 | 232 | 140 | 46,5 | 30 | 57,5 | 17.000 | 112,7 | BULK |
| 102514 | 14 | - | 25 | 25 | 235 | 140 | 49,3 | 30 | 62 | 24.000 | 125 | BULK |

| | | | | | | | | | | | | |
|--------|----|------|----|------|-----|-----|------|----|----|--------|-----|------|
| 102516 | 16 | 5/8" | 28 | 25,4 | 264 | 160 | 49,3 | 30 | 62 | 24.000 | 140 | BULK |
|--------|----|------|----|------|-----|-----|------|----|----|--------|-----|------|

Note: All breakloads are determined by clevis pin & thread.
The user is responsible for choosing the proper cable diameter and for correct assembly.

[back](#)

The logo for allRIG, featuring the word "allRIG" in a stylized, lowercase, italicized font. The "R" is significantly larger and more prominent than the other letters.

Buscarons, 6 - 08022 Barcelona | Tel.: (+34) 934 186 632 | Fax: (+34) 934 185 648

E-Mail: info@allrig.net | www.allrig.net