


RIGGING SCREWS TOGGLE - WIRE

[download pdf \(50 Kb.\)](#)

High Polished Stainless Steel - AISI 316

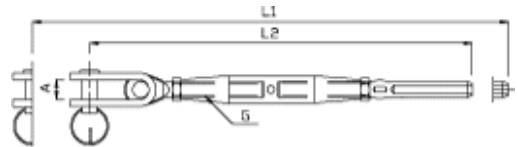

Cat. No.	G (UNF)	Wire (metr.)	Dim. (inch.)	L1 (mm.)	L2 (mm.)	A (mm.)	Pin size (mm.)	Break load (Kg.)	Kg./100	Pack Pcs.
320306A	1/4"	3	1/8"	253	191	8	6,35	1.300	10,7	10
320406A	1/4"	4	5/32"	263	201	8	6,35	1.300	11	10
320408A	5/16"	4	5/32"	304	228	10	8	2.350	16,4	10
320508A	5/16"	5	3/16"	310	234	10	8	2.350	16,6	10
320510A	3/8"	5	3/16"	342	258	12	9,5	3.500	28,2	5
325510A	3/8"	-	7/32"	350	266	12	9,5	3.500	30	5
320610A	3/8"	6	-	357	273	12	9,5	3.500	31,3	5
320611AX	7/16"	6	-	400	310	15	11	4.700	41,4	5
320711AX	7/16"	7	9/32"	405	315	15	11	4.700	41,4	5
320612AX	1/2"	6	-	421	315	18	12,7	5.400	64,8	5
326312AX	1/2"	-	1/4"	421	315	18	12,7	5.400	65	5
320712AX	1/2"	7	9/32"	429	323	18	12,7	5.400	68	5
320812AX	1/2"	8	5/16"	444	338	18	12,7	5.400	73,2	5
320816AX	5/8"	8	5/16"	545	413	20	16	8.000	105,2	BULK
329520AX	3/4"	-	3/8"	621	461	24	19	13.000	169	BULK
321020AX	3/4"	10	-	621	461	24	19	13.000	169	BULK
▼ 321220AX	3/4"	12	-	636	466	24	19	13.000	179	BULK
321220AXX	3/4"	12	-	656	496	24	19	13.000	179	BULK
321320AX	3/4"	-	1/2"	657	497	24	19	13.000	181	BULK
321422AX	7/8"	14	5/8"	779	598	26	22,2	17.000	500	BULK
321625AX	1"	16	-	923	694	29	25,4	24.000	742	BULK
321927AX	1-1/8"	19	3/4"	1038	778	34	28	27.000	990	BULK
322230AX	1-1/4"	22	7/8"	1172	882	40	32	31.000	1385	BULK
322636AX	1-3/8"	26	1"	1303	993	44	36	43.000	1717	BULK

▼ Note: Terminal OD.=20 mm.

Note: All breakloads are determined by clevis pin & thread.

The user is responsible for choosing the proper cable diameter and for correct assembly.

back

Buscarons, 6 - 08022 Barcelona | Tel.: (+34) 934 186 632 | Fax: (+34) 934 185 648

E-Mail: info@allrig.net | www.allrig.net