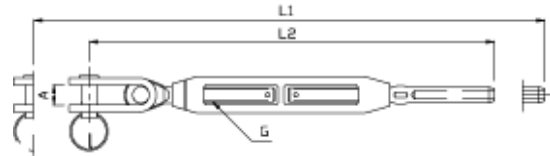


## RIGGING SCREWS TOGGLE-WIRE

[download pdf \(50 Kb.\)](#)High Polished Stainless Steel - AISI 316  
Chromed Bronze Body

Cat. No.	G (UNF)	Wire (metr.)	Dim (inch)	L1 (mm.)	L2 (mm.)	A (mm.)	Pin size	Break Load (Kg.)	Kg./100	PACK (Pcs.)
330306A	1/4"	3	1/8"	255	193	8	6,35	1.300	12,7	10
330406A	1/4"	4	5/32"	265	203	8	6,35	1.300	13	10
330408A	5/16"	4	5/32"	304	228	10	8	2.350	17,4	10
330508A	5/16"	5	3/16"	310	234	10	8	2.350	18,5	10
330510A	3/8"	5	3/16"	349	265	12	9,5	3.500	28,5	5
335510A	3/8"	-	7/32"	357	273	12	9,5	3.500	29	5
330610A	3/8"	6	-	364	280	12	9,5	3.500	32,5	5
330611AX	7/16"	6	-	397	307	15	11	4.700	47,5	5
330711AX	7/16"	7	9/32"	408	318	15	11	4.700	47,5	5
330612AX	1/2"	6	-	425	319	18	12,7	5.400	74	5
336312AX	1/2"	-	1/4"	425	319	18	12,7	5.400	75	5
330712AX	1/2"	7	9/32"	433	327	18	12,7	5.400	77	5
330812AX	1/2"	8	5/16"	448	342	18	12,7	5.400	82	BULK5
330816AX	5/8"	8	5/16"	536	404	20	16	8.000	126	BULK
331016AX	5/8"	10	-	545	413	20	16	8.000	135	BULK
339520AX	3/4"	-	3/8"	625	465	24	19	13.000	190	BULK
331020AX	3/4"	10	-	625	465	24	19	13.000	190	BULK
▼ 331220AX	3/4"	12	-	640	480	24	19	13.000	200	BULK
331220AXX	3/4"	12	-	660	500	24	19	13.000	200	BULK
331320AX	3/4"	-	1/2"	661	501	24	19	13.000	202	BULK
331222AX	7/8"	12	-	786	592	26	22	17.000	311	BULK
331422AX	7/8"	14	-	794	600	26	22	17.000	309	BULK
331425AX	1"	14	-	932	692	29	25,4	24.000	512	BULK
331625AX	1"	16	5/8"	940	700	29	25,4	24.000	505	BULK

▼ Note: Terminal OD.=20 mm.

Note: All breakloads are determined by clevis pin &amp; thread.

The user is responsible for choosing the proper cable diameter and for correct assembly.



Buscarons, 6 - 08022 Barcelona | Tel.: (+34) 934 186 632 | Fax: (+34) 934 185 648

E-Mail: [info@allrig.net](mailto:info@allrig.net) | [www.allrig.net](http://www.allrig.net)